Home Theatre Reference PowerCenter™

POWERBAR™ 1100
POWERBAR™ 2100

Owner's Manual

TABLE OF CONTENTS

Page

Important Safety Information i
Proper Grounding and Installation iv
A Note from the Head Monster 1
Monster's Patented Clean Power™ Stages 3
The Minds Behind the Monster PowerBar™ Design 4
Monster PB 1100/PB 2100 Features 6
Hook-Up Guide 10
- Audio Outlets 10
- Video Outlets 11
- High Current Audio Outlets (on the PB 2100 only) 12
- Coaxial Connections 13
- Phone Connections 14
- Remote "AC/DC In" Control 15

Troubleshooting 16
PowerBar 1100 Specifications 19
PowerBar 2100 Specifications 20

Appendices
Warranty Information 21
Warranty Registration 27

IMPORTANT SAFETY INFORMATION

Please read and observe the following safety points at all times.

⚠ WARNING – Power Sources

Do not plug this PowerBar™ into a power outlet that differs from the source indicated for safe use on the PowerBar™. If you don't know the type of electrical power that is supplied to your home, consult your local power company or a qualified electrician.

⚠ WARNING – Grounding and Polarization

A. Do not force your PowerBar™ plug into an outlet that is not designed to accept a three-wire grounded-type AC plug (a three-prong plug). This plug is designed to be inserted into a grounded-type outlet only. If this plug doesn't fit directly inside your outlet, do not attempt to force it into the outlet. Never attempt to dismantle the plug in any way (or to alter the power cord). Do not attempt to defeat the grounding feature by using a 3-to-2 prong adapter. If you have questions about grounding, consult your local power company or a qualified electrician.

B. If you use rooftop devices such as satellite dishes, antennas, or any other component with wire that connects to your PowerBar™, be sure the wire(s) is properly grounded. Use grounding techniques specified in Section 810 of the National Electrical Code (NEC), ANSI/NFPA 70 (in Canada, Part 1 of the Canadian Electrical Code). This protects against voltage surges and static charges.

C. Do not place any antenna near overhead power lines or any other power circuit. Do not touch any power line or power circuit. Doing so may cause severe physical injury or possibly death.

⚠ WARNING – Liquid: Avoiding Electrical Shocks

A. Do not operate your Monster PowerBar™ if liquid of any kind is spilled onto or inside the unit.

B. Do not operate your Monster PowerBar™ near rain or water that's spilled or contained (e.g., bathtub, kitchen or sink).

⚠ WARNING – Power Cord Safety

A. When routing your PowerBar's AC power cord, do not place it near heavy foot traffic areas (e.g., hallways, doorways, and floors). Do not create a trip hazard with the power cord.

B. If your power cord's protective jacket begins to rip or fray, exposing the internal wiring, shielding, etc., disconnect it from the power source and discontinue use of the Monster PowerBar™ immediately. See the Warranty Information section of this owner's manual for important details.

⚠ WARNING – Storm Precautions

In the event of a lighting storm, it's always a good idea to disconnect your Monster PowerBar™; there is no need to disconnect your separate components. Make sure that ALL of your components and PC products are protected with Monster Power.

⚠ WARNING – No User Serviceable Parts Inside

If, for any reason, your PowerBar™ is not operating properly, do not remove any part of the unit (cover, etc.) for repair. Unplug the unit and consult the Warranty Information section of this owner's manual for important details.

⚠ CAUTION – Exposure To Heat

Do not expose your PowerBar™ to direct sunlight or place it near wall heaters, space heaters, or any enclosed space prone to temperature increase.

⚠ CAUTION – Proper Cleaning

In general, the only cleaning necessary for your Monster PowerBar™ is a light dusting. Unplug your component from the wall before cleaning it. Do not use any type of liquid or aerosol cleaners.

PROPER GROUNDING AND INSTALLATION

⚠ WARNING – Proper Grounding

Monster PowerBar™ requires a properly grounded 3-wire outlet for safety and to protect connected equipment. If your AC outlet is improperly wired (no ground or reverse polarity), the green "GROUND OK" and/or "WIRING OK" LED indicators on the front panel of the Home Theatre Reference PowerBar PB 1100/PB 2100 will not light up. If you're not sure if your home's electrical wiring is properly grounded, have it checked by a qualified electrician.

Many older buildings are inadequately wired. It's very common for a building to be improperly grounded. Building wiring and grounding must conform to applicable NEC (USA) or CEC (Canada) codes for the Limited Connected Equipment Warranty to be valid. If you're not sure about your home's wiring, have it checked by a qualified electrician.

Note to CATV Installer

This reminder is provided to call the CATV System Installer's attention to Article 820-40 of the NEC that provides specific guidelines for proper grounding and in particular, specifies that the cable ground shall be connected to the point of cable entry as practical.

IMPORTANT NOTE – Proper Power and Protection

To completely protect your equipment against electrical surges, every AC power cable, coaxial cable and phone line in the system must be connected to an appropriate PowerBar™.

IMPORTANT NOTE – Proper Protection and the Limited Connected Equipment Warranty

The Limited Connected Equipment Warranty becomes invalid if any wire (AC, coax, or phone), audio or video interconnect leading into the equipment comes from a component that is not properly protected by the PowerBar™. See the Warranty Information section of this owner's manual for important details.

A NOTE FROM THE HEAD MONSTER

Dear Enthusiast,

Noel Lee

THANK YOU for purchasing the Monster Power Home Theatre Reference PowerBar™. This PowerBar reflects our commitment to creating performance-enhancing solutions for home theatre systems, so you can enjoy superior sound and picture quality.

As a long-time audiophile and serious home theater enthusiast, I always knew problematic AC power could degrade picture and sound quality. Unfortunately, ordinary AC power accessories can compromise the performance of the components they power. So, I decided to address the issue. And, with the help of Richard Marsh and other power experts, Monster Power was born. This PowerBar's advanced technology and innovative design provides several unique performance and convenience features. Here are the highlights…

The Monster PowerBar does an excellent job of protecting your components from harmful power surges, but it's benefits include much more than just surge protection. The patented Monster Clean Power™ filter circuitry virtually stops the electromagnetic and radio frequency noise that goes right through typical surge protectors which can degrade sound and picture quality. In addition, your PowerBar also features patented noise isolation circuits that separate analog audio and video outlets. The result is high quality sound and picture that's free from performance-damaging interference.

Other Monster Power breakthroughs include patented Tri-Mode™ protection featuring an audible alarm. This feature automatically disconnects power from your electronics if you're hit by a big surge. We've also included surge-protected coax and phone connections to ensure protection for all of your components. The PowerBar also features a patent pending color-coding system, which identifies where each component should be connected.

These days, home theater components are better than ever, providing thrilling and dramatic sound and razor sharp picture. We know your new PowerBar will help bring it all together with Clean Power and superior system protection. With Monster Power, you'll enjoy the best possible sound and picture. And, that's what home theater is all about.

Noel Lee,
The Head Monster

MONSTER'S PATENTED CLEAN POWER™ STAGES

Monster Clean Power performs two tasks that are vital to maintaining optimum home theater performance: 1) noise filtration and 2) noise isolation. The higher the Clean Power stage number (1-5), the more sophisticated and advanced the filters are that reject noise generated on the AC powerline. In addition, the higher the Clean Power stage number, the more isolation that exists between connected equipment for maximum rejection of component-generated noise.

Monster PowerBars featuring Clean Power circuitry are each designated with a Clean Power Stage. The PowerBar incorporates Monster Clean Power **Stage 2** circuitry which filters both AC powerline noise and reduces noise generated by your connected equipment. For example, your television generates video noise which is different than the analog noise your AV receiver generates. Clean Power Stage 2 features two ultra-advanced, isolated filters (audio and video) to provide for the best possible AC powerline noise rejection and inter-component isolation for improved component-generated noise rejection. All of these features make the PowerBar ideal for your home theater system. To learn more about patented Monster Clean Power and the complete product family of PowerCenters, voltage stabilizers and amplifiers, please visit **www.MonsterPower.com**.

THE MINDS BEHIND THE MONSTER POWERCENTER DESIGN

Richard Marsh – There are few experts able to solve the complex problems associated with AC power and complex home theater systems. Richard Marsh is one of these illustrious few. He has designed best selling power conditioning components costing more than $3,000 US and now brings his expertise to Monster Power. Richard developed Monster's patented Clean Power™ circuitry. He is also responsible for several other groundbreaking designs. Richard's background and research into amplifier and capacitor design led to his development of the Servo-DC feedback concept in power amplifiers – a concept that is used by virtually every amplifier manufacturer today. His status as both the inventor of the MultiCap™ internal bypass capacitor and as the driving force behind the high-end audio balanced circuit design concept has influenced the audiophile community for years. Richard is responsible for some of the high-end audio world's most respected product designs, essays and articles, and has contributed to *The Absolute Sound* and *Audio* magazines. He is included in *Who's Who in the West*.



Demian Martin – Demian Martin has been solving complex AC power problems for several years. As a technical consultant for successful paper and steel mills, Demian helped create several innovative AC power solutions. He developed techniques to dramatically improve the efficiency of these factories' high power motor control systems – up to 50,000 watts — helping them avoid the costly premiums many factories must pay for AC power inefficiency. Demian was also the co-founder of Spectral Audio and was the chief designer of their many pioneering designs for amplifiers, D/A converters, and other high-end audio designs. He now brings his expertise to Monster Power's elite research and development team.

Noel Lee – Noel Lee, The Head Monster, is best known for popularizing the concept of high performance audio cable 25 years ago with his creation of Monster Cable. Originally a laser-fusion design engineer at Lawrence Livermore National Laboratory and later a touring musician, Noel has invented or co-invented over 250 U.S. and international patents and drives the explosive growth of The Monster Group companies in more than 80 countries worldwide. Monster Power is Noel's realization of a long-nurtured vision of making affordable power solutions that deliver the best possible sound and picture.

MONSTER PB 1100 POWERBAR FEATURES

TOP VIEW

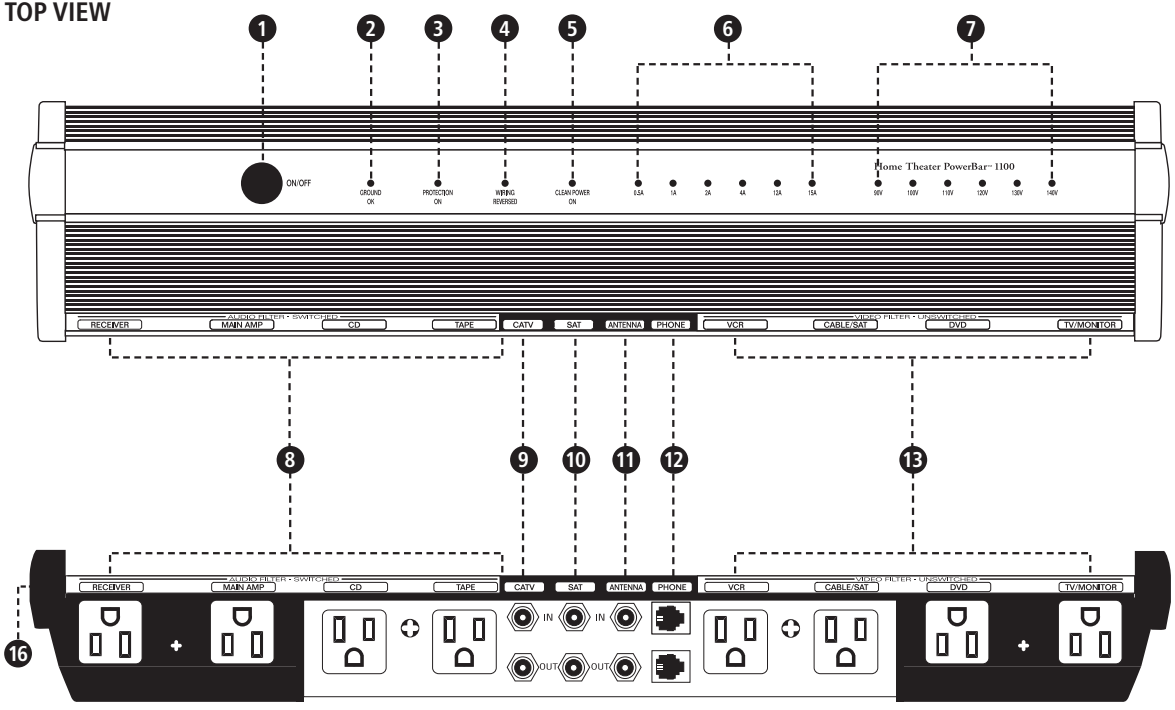

SIDE VIEW

MONSTER PB 2100 POWERBAR FEATURES

TOP VIEW

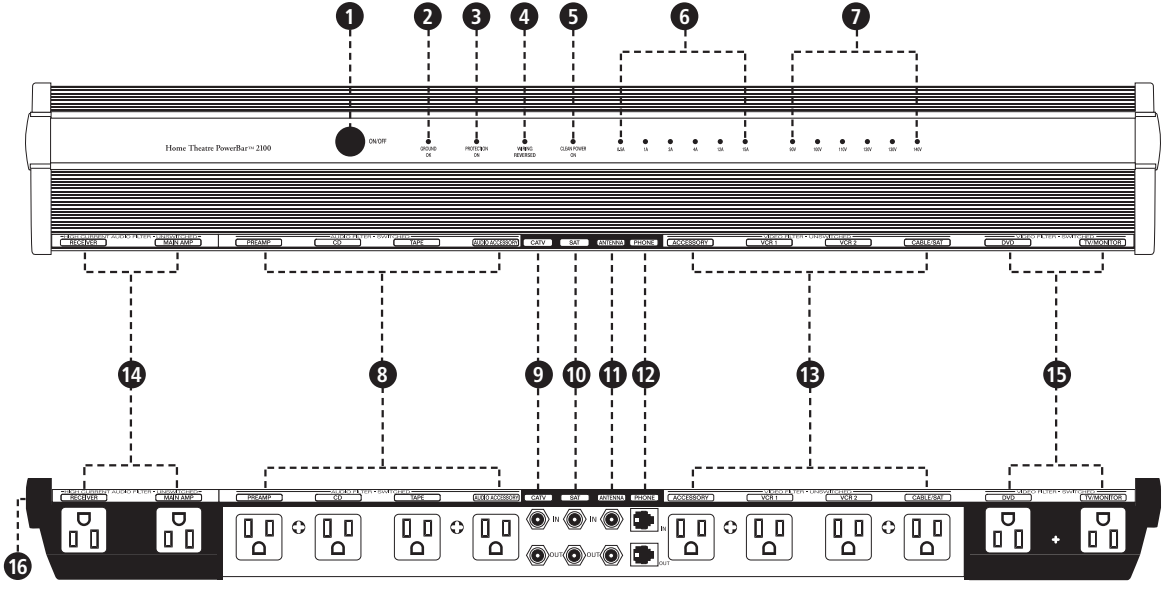

SIDE VIEW

MONSTER PB 1100/PB 2100 POWERBAR FEATURES

1. **"On/Off" Button:** Turns on and off switched outlets. (Unswitched outlets remain on at all times.)
2. **"Ground OK" Indicator:** Indicates the AC outlet the PowerBar is plugged into is properly grounded.
3. **"Protection On" Indicator:** Indicates Monster surge protection circuitry is functioning properly.
4. **"Wiring Reversed" Indicator:** Indicates the Line-neutral polarity is incorrect on the AC outlet the PowerBar is plugged into. If this indicator is lit, consult your local power company or a qualified electrician.
5. **"Clean Power On" Indicator:** Indicates Monster Clean Power circuitry is functioning properly.
6. **"Current Usage" Indicator:** Indicates amperage draw through an LED bar graph.
7. **"Input Voltage" Indicator:** Indicates input voltage through an LED bar graph.
8. **Audio Outlets (Switched):** These outlets have a specifically designed filter circuit that reduces interference to your audio components.
9. **TV/Cable Protection:** Provides surge protection for a TV/cable connection. The input connects the coaxial cable from your cable company or antenna. The output connects the coaxial cable to your TV or cable box input.
10. **Satellite Protection:** Provides surge protection for a TV or satellite connection. The input connects the coaxial cable from your satellite dish. The output connects the coaxial cable to your satellite receiver input.
11. **Antenna Protection:** Provides surge protection for an antenna connection. The input connects the coaxial cable from your antenna. The output connects the coaxial cable to your TV input.

12. **Phone Line Surge Protection:** Provides surge protection against damaging voltage surges and spikes from the phone line.

13. **Video Outlets (Unswitched):** These outlets have a specifically designed filter circuit that reduces interference to your video components.

14. **(PB 2100 only) High Current Audio Filter (Unswitched Outlets):** These outlets have a specifically designed filter circuit for high power audio components like amplifiers and pre-amplifiers.

15. **(PB 2100 only) Video Outlets (Switched and Unswitched):** These outlets have a specifically designed filter circuit that reduces interference to your video components.

16. **Remote "DC In" Control:** Allows you to automatically turn on the PowerBar via the Remote "DC Out" on another component, such as an A/V receiver.

HOOK-UP GUIDE

Audio Outlet Hook-Up

These outlets have a special filter circuit that is optimized to reduce interference to your audio components.

A) Attach a Monster Power® identification label to each component's power cord before you plug it into the appropriate color-coded PowerBar™ outlet.

B) Plug each component's power cord (Receiver, Processor, etc.) into the PowerBar's corresponding outlet. For components not listed, determine if they are audio, video, or high current audio, and use a corresponding outlet for best performance.

IMPORTANT NOTE

It does not harm video components to be connected to the audio outlets. However, for best performance, we recommend plugging in only audio components to the audio outlets.

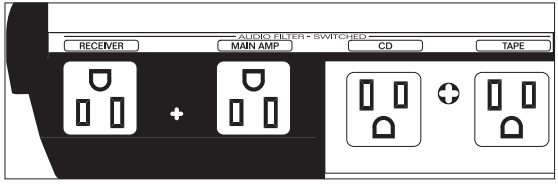

PowerBar™ PB 1100

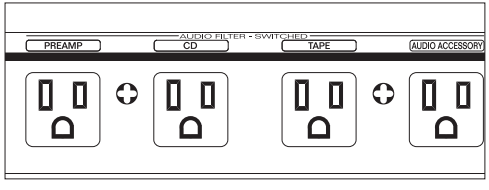

PowerBar™ PB 2100

HOOK-UP GUIDE

Video Outlet Hook-Up

These outlets have a special filter circuit that is optimized to reduce interference to your video components.

A) Attach a Monster Power identification label to each component's power cord before you plug it into the appropriate color-coded PowerBar™ outlet.

B) Plug each component's power cord (VCR, TV/Monitor) into the PowerBar's corresponding outlet. For components not listed, determine if they are audio, video, or high current audio components, and use a corresponding outlet for best performance.

IMPORTANT NOTE

It does not harm audio components to be connected to the video outlets. However, for best performance, we recommend plugging in only video components to the video outlets.

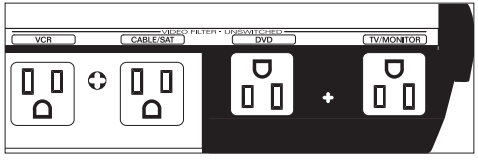

PowerBar™ PB1100

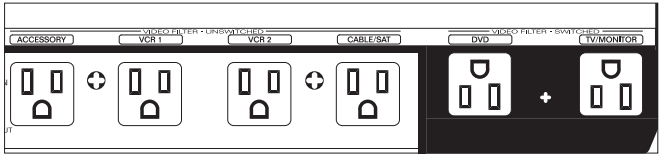

PowerBar™ PB2100

HOOK-UP GUIDE

High Current Audio Outlet (Unswitched) Hook-Up (PowerBar™ 2100 only)

These outlets are designed to deliver maximum current to power hungry components like amplifiers and pre-amplifiers.

A) Attach a Monster Power® identification label to each component's power cord before you plug it into the appropriate color-coded PowerBar™ outlet.

B) Plug each component's power cord (Amplifier, etc.) into the PowerBar's corresponding outlet. For components not listed, determine if they are audio, video or high current audio, and use a corresponding outlet for best performance.

IMPORTANT NOTE

It does not harm audio or video components to be connected to the high current audio outlets. However, for best performance, we recommend plugging in only high-current audio components to the high current audio outlets.



HOOK-UP GUIDE

Coaxial Connections Hook-Up

Coaxial connections provide surge protection against damaging voltage surges and spikes on the incoming coax cable.

Protect coaxial cables as follows:

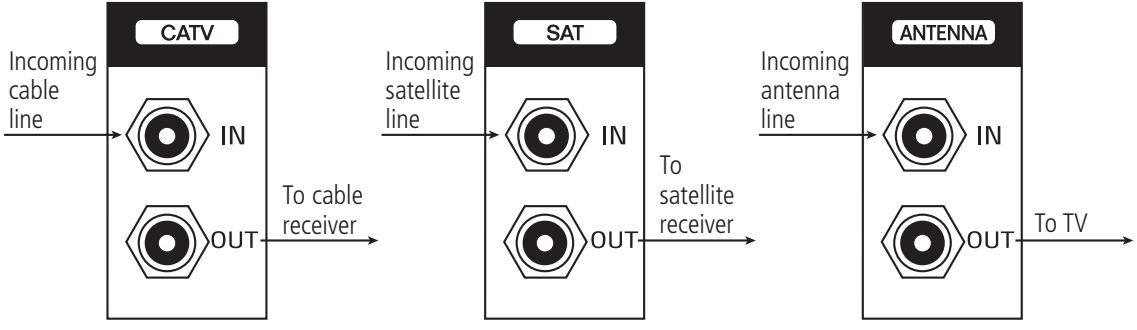

Note: You will need additional coaxial cables to connect the PB 1100/PB 2100 to your components.

Phone Connections

Phone connections provide surge protection against damaging voltage surges and spikes coming from the phone line.

Protect phone lines connections as follows:

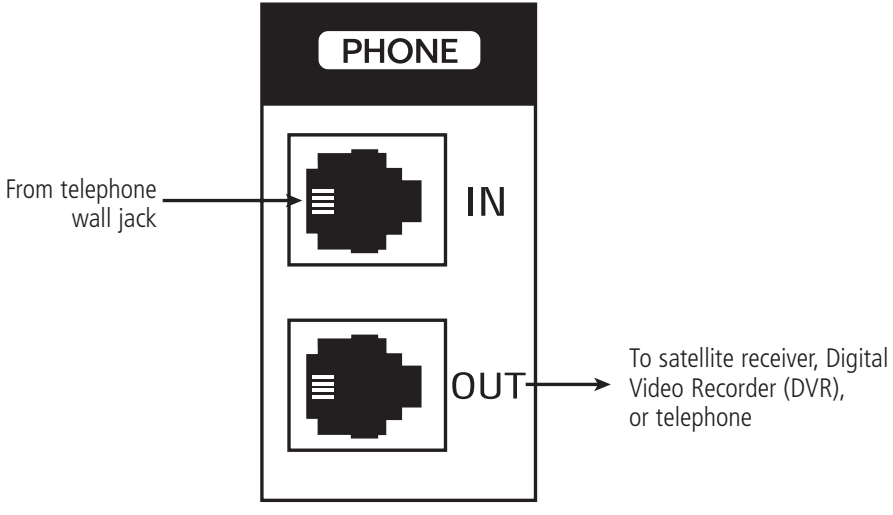

Remote "AC/DC In" Control Hook-Up

This feature connects your PowerCenter to an automated Home Theater control system or allows another component with a Remote "DC Out" connection to automatically turn on and off your PowerCenter.

A) Plug the AC power cable of the component you are using to control the PowerCenter into an unswitched outlet on the PowerCenter. Note: This component must deliver a control voltage between 3-30 volts DC.

B) Plug one end of the 1/8" miniplug (supplied) into the corresponding Remote "AC/DC In" connection on the PowerCenter.

C) Plug the other end of the 1/8" miniplug into the Remote "DC Out" connection on the component that you want to turn on and off the PowerCenter's Switched Outlets when it is turned on.

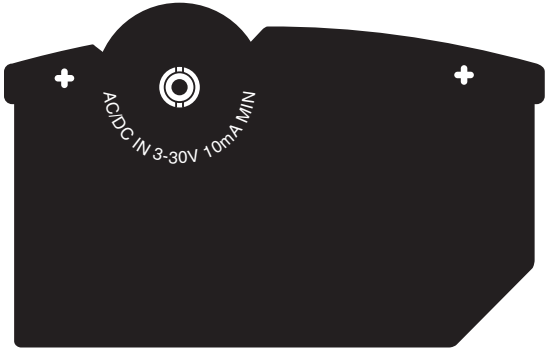

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
The PowerBar™ is not receiving power.	The PowerBar™ is not turned on	• Turn the PowerBar™ switch on. • Make sure the PowerBar's AC power plug is plugged into a properly grounded 120V wall outlet. • In some households, a wall switch may need to be thrown to make the wall plug come alive. Try turning on the light switches located near the wall unit powering the PowerBar.
	Too many devices are connected, causing an overload, throwing the Thermal Circuit Breaker. Please note: The total power consumption on all the components powered by the PowerBar should not exceed 1800 watts.	• Press the PowerBar Thermal Circuit Breaker button (labeled as RESET below the power cord) in to reset. Please allow 10 minutes from the time the circuit breaker is thrown before attempting to reset. If you reset too soon, the breaker will prematurely sense power overload and not allow unit to operate.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
The PowerBar is not receiving power (cont.).	The PowerBar cord is plugged into an outlet on the back of one of your components and the component is not turned on.	• Turn the component power on. NOTE: For the best possible performance, plug the PowerBar into a wall outlet, not another component.
	The component is plugged into a switched outlet and the PowerBar has not been turned on.	• Turn the PowerBar on. • Or, plug the component in
	The PowerBar is plugged into a switched outlet, on a component which is not turned on.	• Turn on the component.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
Speakers emit a humming or buzzing noise	The PowerBar is sharing AC power with equipment that is not properly grounded.	• Connect your PowerBar to a dedicated outlet.

SPECIFICATIONS

PB 1100 POWERBAR™

Continuous Duty Electrical Rating	120V/60Hz	
Maximum Current Rating	15A/1800W	
Protection Modes	Line-Neutral (L-N) Line-Ground (L-G) Neutral-Ground (N-G)	
Total Energy Dissipation	2775 Joules	
Clamping Level (TVSS Voltage)	330 Volts	
Clamping Response Time	Less than 1 Nanosecond (<1Ns)	
Remote Trigger In	3 – 30v DC	
Dimensions	Width:	4 inches
	Height:	3.625 inches
	Length:	19.5 inches

SPECIFICATIONS

PB 2100 POWERBAR™

Continuous Duty Electrical Rating	120V/60Hz	
Maximum Current Rating	15A/1800W	
Protection Modes	Line-Neutral (L-N) Line-Ground (L-G) Neutral-Ground (N-G)	
Total Energy Dissipation	2775 Joules	
Clamping Level (TVSS Voltage)	330 Volts	
Clamping Response Time	Less than 1 Nanosecond (<1Ns)	
Remote Trigger In	3 – 30v DC	
Dimensions	Width:	4 inches
	Height:	3.625 inches
	Length:	26.75 inches

LIMITED WARRANTY FOR CONSUMERS

Monster, LLC, 7251 Lake Mead Blvd West, 3d Floor, Las Vegas, NV, USA ("Monster") extends You this Limited Warranty. Statutory or common law may provide You with additional rights or remedies, which shall not be affected by this Limited Warranty.

DEFINITIONS

"Adequate Use" means use of the Product and Connected Equipment (i) within a home or dwelling, (ii) for private (as opposed to commercial) purposes, (iii) in conformance with all applicable local, state or federal law, code or regulations (including without limitation building and/or electrical codes), (iv) in accordance with manufacturer recommendations and/or instructions in the materials and documentation that accompany the Product and any Connected Equipment, (v) with proper electrical grounding, (vi) with proper and direct connection between the Product and an AC power source that has protective grounding (excluding gas or diesel powered generators), (vii) with cable or telephone lines to any Connected Equipment properly connected to the Product, and (viii) without a connection in a "daisy-chain" fashion to or with any extension cord, surge suppressor, power strip, uninterruptible power supply ("UPS") or other equipment.

"Authorized Dealer" means any distributor, reseller or retailer that (i) was duly authorized to do business in the jurisdiction where it sold the Product to You, (ii) was permitted to sell You the Product under the laws of the jurisdiction where You bought the Product, and (iii) sold You the Product new and in its original packaging.

"Connected Equipment" means any device that is (i) generally suited to be used with the Product or products of the same kind, (ii) meets the requirements of all applicable laws and safety standards, (iii) contains only parts manufactured, sold or recommended by the original manufacturer of the Connected Equipment, and (iv) has not been altered, tampered with or modified by any person other than its manufacturer or service personnel authorized or recommended by the manufacturer of the Connected Equipment.

"Connected Equipment Damage" means physical damage caused to Connected Equipment due to a Product Defect (i) by a transient AC power, cable, telephone, or lightning surge while connected to a properly installed Product, (ii) not by

a defect or unrelated damaging of the Connected Equipment or a surge/spike or lightning strike through a source, medium or connection other than through the Product, and (iii) does not extend to loss of data or consequential, indirect or special damages resulting from the Connected Equipment Damage.

"Fair Market Value" ("FMV") means the fair market value of the Connected Equipment at the time Connected Equipment Damage occurs.

"Formal Warranty Claim" means a claim made in accordance with the section "Formal Warranty Claims" herein.

"Maximum Coverage Amount" means the maximum amount that Monster will pay to You under this Limited Warranty for Connected Equipment Damages and is defined in relation to each Product in the Specifications Table below.

"Product" means a Product (i) that is listed in the Specifications Table below, (ii) that You bought from an Authorized Dealer new and in its original packaging, and (iii) whose serial number, if any, has not been removed, altered, or defaced.

"Product Defect" means an inadequacy of the Product that existed at the time when You received the Product from an Authorized Dealer and that causes a failure of the Product to perform in accordance with Monster's documentation accompanying the Product, unless such failure has been caused completely or partly by (a) any use other than Adequate Use, (b) transportation, neglect, misuse or abuse by anyone other than Monster's employees; (c) alteration, tampering or modification of the product by anyone other than a Monster employee; (d) accident (other than a malfunction that would otherwise qualify as a Product Defect); (e) maintenance or service of the Product by anyone other than a Monster employee; (f) exposure of the Product to heat, bright light, sun, liquids, sand or other contaminants; or (g) acts outside the control of Monster, including without limitation acts of God, fire, storms (excluding lightning surges), earthquake or flood.

"Warranty Period" means the time period during which Monster must have received Your Formal Warranty Claim. The different Warranty Periods related to Product Defects and Connected Equipment Damage are defined in the Specifications Table below. The Warranty Period commences on the date when You purchased or received (whichever occurs later) the Product from an Authorized Dealer as evidenced by the Authorized Dealer's invoice, sales receipt or packing slip. If You do not have written proof of the date of purchase or receipt, then the Warranty Period commences three (3) months after

the date when the Product left Monster's or its factory as evidenced by Monster's records. The Warranty Period ends after the time defined in the Specifications Table has expired, or after You have transferred ownership of the Product, whichever occurs earlier. Also, You must call Monster and obtain a Return Authorization Number (as described under "How to Make a Claim") within two (2) months after You discover a Product Defect (or should have discovered it, if such Product Defect was obvious).

"You" means the first individual person that purchased the Product in its original packaging from an Authorized Dealer. This Limited Warranty does not apply to persons or entities that bought the Product (i) in used or unpackaged form, (ii) for resale, lease or other commercial use, or (iii) from someone other than an Authorized Dealer.

SCOPE OF THIS LIMITED WARRANTY

PRODUCTS. If a Product contained a Product Defect when You bought it from an Authorized Dealer and Monster receives a Formal Warranty Claim from You within two (2) months after You discover such Product Defect (or should have discovered it, if such Product Defect was obvious) and before the end of the Warranty Period for Product Defects applicable to the affected Product, then Monster will provide You with one of the following remedies: Monster will (1) repair or, at Monster's sole discretion, replace the Product, or (2) refund to You the purchase price You paid to the Authorized Dealer for the affected Product if repair or replacement is not commercially practicable or cannot be timely made.

CONNECTED EQUIPMENT DAMAGE. Monster will also provide You with a remedy regarding Connected Equipment Damage if (i) You have a claim under the Limited Warranty for Products because of a Product Defect that causes Connected Equipment Damage despite Adequate Use, and (ii) Monster receives a Formal Warranty Claim from You before the end of the Warranty Period for Connected Equipment Damage applicable to the affected Product. If the conditions listed in the preceding sentence are met, Monster will provide You with one of the following remedies provided that Monster may decide at its sole discretion which of the three remedies it provides: Monster will (1) replace the damaged Connected Equipment; (2) pay to repair the damaged Connected Equipment; or (3) pay You the FMV of the Connected Equipment, provided that such payments shall not exceed (i) the Maximum Coverage Amount for the Product, or (ii) the actual damage having arisen from power surges due to a Product Defect. NOTE: COMPENSATION FOR RESTORATION OF DATA LOSS

IS NOT COVERED AND MONSTER DOES NOT ASSUME ANY LIABILITY FOR ANY INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES UNDER THIS LIMITED WARRANTY.

GENERAL PROVISIONS

CHOICE OF LAW/JURISDICTION. This Limited Warranty and any disputes arising out of or in connection with this Limited Warranty ("Disputes") shall be governed by the laws of the State of California, USA, excluding conflicts of law principles and excluding the Convention for the International Sale of Goods. The courts located in the State of California, USA shall have exclusive jurisdiction over any Disputes.

OTHER RIGHTS. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE AND JURISDICTION TO JURISDICTION, AND WHICH SHALL NOT BE AFFECTED BY THIS LIMITED WARRANTY. THIS WARRANTY EXTENDS ONLY TO YOU AND CANNOT BE TRANSFERRED OR ASSIGNED. If any provision of this Limited Warranty is unlawful, void or unenforceable, that provision shall be deemed severable and shall not affect any remaining provisions. In case of any inconsistency between the English and other versions of this Limited Warranty, the English version shall prevail.

REGISTRATION. Please register Your Product at www.MonsterPower.com/Warranty. Failure to register will not diminish Your warranty rights.

SPECIFICATIONS TABLE

Product Model No.	Warranty Period for Products	Maximum Coverage Amount	Warranty Period for Connected Equipment Damage
PB 1100	5 Years	US$250,000 Maximum	5 Years
PB 2100	5 Years	US$300,000 Maximum	5 Years

FORMAL WARRANTY CLAIM

HOW TO MAKE A CLAIM. In the event damage has occurred to Products, You must follow these instructions: (1) Call 877-800-8989 within two (2) months after You discover a Product Defect (or should have discovered it, if such Product Defect was obvious); (2) Give a detailed explanation of how the damage occurred; (3) Obtain a Return Authorization Number; (4) Upon receipt of a claim form (which may be sent to You after You filed Your Formal Warranty Claim), fill out the claim form entirely; (5) Return the Products, shipping prepaid by You (to be refunded if You are entitled to a remedy under the Scope of this Limited Warranty), to Monster for verification of damage, along with a copy of Your original sales receipts and proof of purchase (UPC label or packing slip) for such Products, the completed claim form, and printed Return Authorization Number on the outside of the return package (the claim form will include instructions for return).

FURTHER PROCEEDINGS. Monster will determine whether a Product Defect existed. Monster may, at its discretion, direct You to obtain a repair estimate at a service center. If a repair estimate is required, You will be instructed on how to properly submit the estimate and the resulting invoice to Monster for payment. Any fees for repairs may be negotiated by Monster.

TIMING. If You bring a Formal Warranty Claim and fully comply with all terms and conditions of this Limited Warranty, Monster will use its best efforts to provide You with a remedy within thirty (30) days after receipt of Your Formal Warranty Claim (if You reside in the United States - forty-five (45) days if You reside elsewhere), unless obstacles outside Monster's control delay the process.

Ver.121703 – US/EU ©2003 Monster, LLC

Register Your Product For Warranty Coverage

Please either complete and return this questionnaire by mail, or go to **www.MonsterPower.com/Warranty** to register online (online registrations are automatically entered each month in a drawing to win Monsterous prizes).

Name (please print) _____ _____Age_____

Address _____

City/State/Country_____Zip/Postal Code _____

Daytime Phone Number (with area and/or country code) _____

Evening Phone Number (with area and/or country code) _____

Name and Location of Dealer _____

Monster Power Amplifier Model Purchased _____ _____Serial Number_____

Other Monster Power Amplifier and/or Monster Cable Products Used _____

1. **How did you hear about Monster Power?**
   ☐ Salesperson ☐ Friend ☐ Newspaper/Magazine Advertisement ☐ Newspaper/Magazine Story or Review
   ☐ In-Store Display ☐ Other_____
2. **Estimated value of your entire system?**
   ☐ Under $1,000 ☐ $1,000–3,000 ☐ $3,000–5,000 ☐ $5,000–10,000 ☐ Over $10,000
3. **What is your favorite music?**
   ☐ Classic Rock ☐ Alternative ☐ Classical ☐ R&B ☐ Rap ☐ Country ☐ New Age Instrumental
   ☐ Jazz ☐ Blues ☐ Pop ☐ Oldies ☐ Other_____
4. **Did you buy this Monster Power Amplifier with a new system or component?** ☐ Yes ☐ No
5. **Was this Monster Power Amplifier a gift?** ☐ Yes ☐ No
6. **What was the purchase price of this unit?** _____

7. How would you describe your experience when purchasing this product?
☐ The salesperson was knowledgeable and helpful ☐ The salesperson was not knowledgeable about Monster Power products
☐ I knew exactly what I wanted and didn't need any help with my decision ☐ Not applicable ☐ Other_____

8. Approximately how many times have you purchased Monster Power products?
☐ This is the first ☐ Two ☐ Three ☐ Four ☐ Five ☐ More than five

9. How would you describe Monster Power Amplifier's contribution to your system?
☐ I never tried it any other way ☐ It made no difference at all ☐ I noticed a slight improvement
☐ I am impressed. It made a big improvement ☐ I can't believe it! Is this the same system?

10. What audio, video or music magazines do you read?
☐ Widescreen Review ☐ Stereophile ☐ Stereo Review ☐ Home Theater ☐ Audio Video Interiors ☐ The Absolute Sound
☐ Home Entertainment and Design ☐ Stereophile's Guide to Home Theater ☐ DVD, etc. ☐ Other_____

11. Annual household income?
☐ Under $25,000 ☐ $25,000–50,000 ☐ $51,000–100,000 ☐ Over $100,000

12. Age? ☐ Under 18 ☐ 18–34 ☐ 34–49 ☐ 49–59 ☐ 59–69 ☐ 69–79 ☐ Over 79

13. Have you made any purchases through the mail or on the Internet in the last twelve months? ☐ Yes ☐ No

14. ☐ Male ☐ Female

15. Do you rent… ☐ DVDs ☐ Video Tapes

16. Do you buy… ☐ DVDs ☐ Video Tapes ☐ Online music

17. If you could suggest a new Monster Power product or an improvement to one or more of our existing products, what would it be?_____

Please return warranty registration to:

Monster Power Warranty Registration
c/o Monster Cable Products, Inc.
455 Valley Drive
Brisbane, CA 94005
USA

NOTES

Monster, LLC
7251 Lake Mead Blvd West, 3rd Floor • Las Vegas, NV 89128 • USA
Visit us on the web at: www.MonsterPower.com
Call us toll-free at:
877-800-8959

The Monster Power Home Theatre Reference PowerBar PB 1100 and PowerBar PB 2100 are protected under U.S. Pat. No. 5,589,718; 6,683,770; 6,614,636; 6,473,510; 6,456,091; D 446,504. Other Patents Pending.

Designed in the USA by the Monster Power Dream Team
and manufactured to Monster quality specifications in China.

"Monster" "Monster Cable" "Monster Power" the "Monster Power" logo "T2" "Tri-mode" "Clean Power" "PowerCenter" "PowerLine" and the PowerBar design and packaging are registered and unregistered trademarks of Monster Cable Products, Inc. and it's subsidiaries in the US and other countries.
© 2003–2004 Monster, LLC.